



**The Clear Choice**  
Water Filtration Systems

# TFC-70F-TW

## 2,5" in-line TWIST TYPE reverse osmosis membrane

### General Description:

AQUAFILTER TFC-70F-TW are state-of-the-art reverse osmosis membranes. They were designed to fit white 2.5" in-line TWIST TYPE housing.

They effectively remove 96%-99% of suspended particles, most bacteria and viruses, VOC's (not smaller than 0.0001 µm) and even ions. All filtered impurities are being flushed to drain.



TFC-70F-TW series membranes improve overall quality of water. Keep in mind that the performance of the RO membranes depends on water temperature and applied pressure. Low temperature of influent water will affect (lower) the membrane performance. Pressure has similar effect. In such cases booster pump AFXPOMP is required.

TFC-70F-TW features easy twist-off filter four stage 1/4 turn encapsulated cartridge, all designed to make installation and replacement quick, easy and sanitary.

Each cartridge is pressure tested.

### Features:


- High quality
- Competitive Pricing
- Made of safe, food grade materials
- Cartridges are removed with a simple ¼-turn
- Removes suspended particles, most bacteria and viruses, VOC's (not smaller than 0.0001 µm), ions
- Made in EU with High Quality materials
- Component NSF Certified and FDA CFR Title 21 Compliant
- Cartridges are attractively labeled
- Easy Cartridge Replacements!

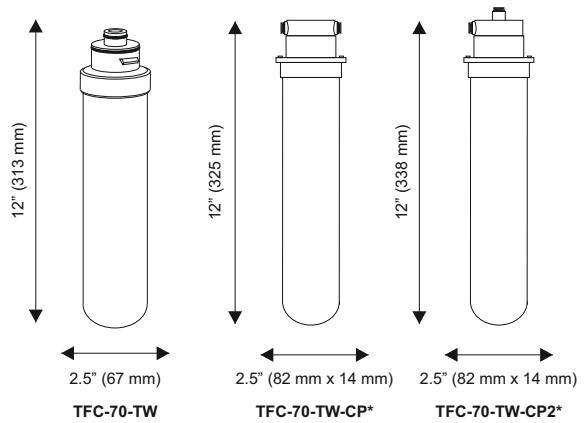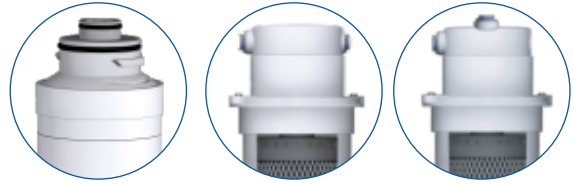

\* Cartridges Available for Sale with Cap

CAT #	Microns	Working Pressure	Working Temp.	Permeate Flow Rate (Gals/Day)	Permeate Flow Rate (Liters/Day)	Filter Life* months
FCCBL-S-TW	0.0001 µm	2.8 bar - 6 bar (42 psi - 90 psi)	2°C - 45°C (35°F - 113°F)	70	264	60
FCCBL-S-TW-CP	0.0001 µm	2.8 bar - 6 bar (42 psi - 90 psi)	2°C - 45°C (35°F - 113°F)	70	264	60
FCCBL-S-TW-CP2	0.0001 µm	2.8 bar - 6 bar (42 psi - 90 psi)	2°C - 45°C (35°F - 113°F)	70	264	60

\* filter cartridge lifetime based on contamination level of potable water.



### NOTE

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
- We strongly recommend regularly scheduled maintenance and replacement of the filter cartridge in order for the product to perform properly.
- Replace the filter cartridge at least every 3 or 6 months (depending on water quality).
- Water filtration systems can help reduce the presence of contaminants. In addition, some water filtration systems can help reduce the presence of microorganisms or other contaminants with potential health effects.

**LIMITED WARRANTY:** AQUAFILTER warrants that this product is free from defects in materials and workmanship. This limited warranty does not apply to failures that result from abuse, misuse, alteration or failure to properly comply with installation or cartridge change instructions and water quality.

All Aquafilter images, trademarks, logos, and other intellectual property are the sole and exclusive property of Aquafilter, Inc. and may not be used without our express written permission.

**Aquafilter Manufacturing Facility**



**Aquafilter Inc.**  
Hunt Valley 21030, USA  
us@aquafilter.com



**Aquafilter Germany**  
15234 Frankfurt, Germany  
de@aquafilter.com



**Aquafilter Europe**  
91-222 Lodz, Poland  
pl@aquafilter.com



Made in EU

